



PingID SSO configuration via SimpleSAML 2.0 - Implementation Steps

Ping Identity

Prerequisites

Claromentis to Install the login handler module

Step 1

Once the Login Handler module has been installed - The following URL and Attribute configuration will need to be applied within your Claromentis PingID application control panel:

Entity ID:

```
https://example.myintranet.com
```

ACS URLs:

```
https://example.myintranet.com/custom/loginhandler/simplesaml/public/module.php/saml/sp/saml2-acs.php/claromentis
```

SLO Endpoint:

```
https://example.myintranet.com/custom/loginhandler/simplesaml/public/module.php/saml/sp/saml2-logout.php/claromentis
```

Note: Please ensure you update **example.myintranet.com** to match your intranet URL.

Attribute Statements:

Attributes	PingOne Mappings
username	Username
firstname	Given Name
surname	Family Name
email	Email Address


Note: The **Attribute** values may be case sensitive so please ensure these are set correctly within your PingID IDP.

Step 2

Once the attributes have been set within PingID, you'll need to apply your IDP URL and Metadata.xml to the login handler module.

1. Within your claromentis intranet site, using the application menu navigate to:

Admin > Login Handler > SSO Configuration

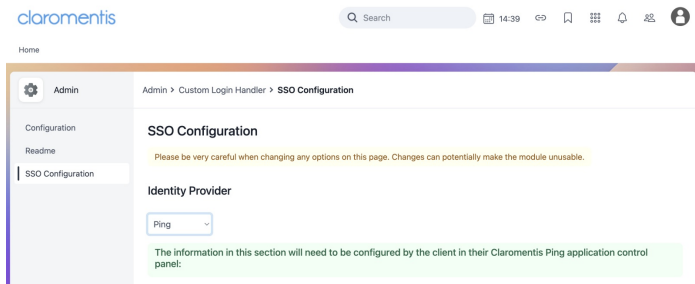

2. Scroll down to the **IDP Configuration** section and set the **IDP Identifier** to your IDP URL

3. In the **Federation Metadata XML** section select "**choose file**" and upload your Metadata.xml

Important: Please be very careful when making changes within the Admin panel and only make changes to the values we have asked (IDP Identifier and metadata.xml)

NameID Policy - Please confirm if this has been changed from the default setting, otherwise this can be remain set to "Unspecified"

If you have any issues with applying the IDP URL or metadata please let us know in the project or change request ticket you have open and we can assist you with this.

Step 3

Optional: Test the configuration and SSO - joint work between Claromentis and client. For Claromentis to perform this your team will need to configure a test user, configured like the below:

PingID test user - username and **password** need to be provided, along with the following 3 attributes populated for this user:

- 1 - Firstname
- 2 - Lastname
- 3 - Email

IMPORTANT - Please ensure provisioned test users don't have 2FA enabled as this may stop us from testing and completing the work

Step 4

Test SSO and confirm you can log in successfully - claromentis to troubleshoot with your team if needed.

