

# LDAP - Configure Profile Fields

## Introduction

Active Directory (AD) is a database that stores information about users and LDAP is a protocol that allows you to talk to it.

- A user profile field in your AD will have an attribute name.
- A user profile field in claromentis will have a key.
- Mapping an AD attribute to a Claromentis key ensures the information from the AD field will populate the Claromentis field upon the next sync.
- This will work for every user that you are bringing across from your AD into Claromentis.

*Please note:* Attribute names may not relate to the field information itself. Sometimes the attribute is named logically i.e. "surname" corresponds to a users last name but in other instances the attribute name is unrelated i.e. "init\_2" corresponds to a users interests. The name is arbitrary so concern need only be about knowing what user information the attribute name represents.

We have created an LDAP tool in Claromentis for you to use to make mapping fields and the subsequent sync as painless as possible.

- This article will follow on from the the "Setting up the LDAP tool" guide.
- It is recommended to read that article first before following along with this one.

## LDAP Tool In Claromentis

You will have already set up your connection using the tool when following the previous guide.

• To access the tool again head to Applications > Admin > Sysadmin > LDAP

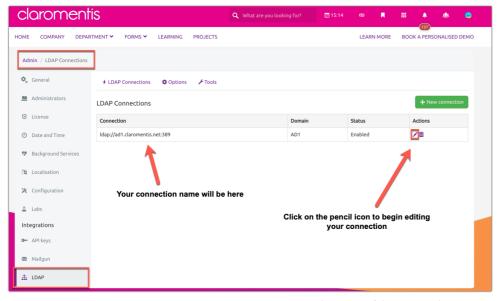


Image 1 - Landing page of the LDAP tool

Click on the pencil Icon shown in Image 1 in order to begin editing the connection

- Section 3 of the tool is where AD attributes can be mapped to Claromentis fields, as shown in Image 2.
- The attributes that are currently set up to run on the next sync will always appear in section 3.

- After the initial set up, this table will be populated by default fields that are mandatory and cannot be removed.
  - These include: first name, surname, email and telephone number.
- However at any time, you can use the LDAP tool to edit fields and configure new ones to run on the next sync that do not include the default.

In Image 2, it is shown that information relating to users interests has been set up to sync from the AD attribute "Initials" to the claromentis field "Interests" using the key {m}user\_interest"

- In this way the data has been mapped (or tied) between these fields.
- It is important to realise that if there is information in your AD you wish to sync to Claromentis, you may have to create an appropriate field in Claromentis if one does not already exist.
  - $\circ\;$  For example your AD may store the extension number of users.
  - Claromentis does not have a corresponding user profile field for an extension number.
  - Therefore in order to map the AD information a field for "extension" has to be created in Claromentis first.
  - $\circ\;$  When a field is created in Claromentis it's key is generated automatically.
  - We have created a video guide on how to create a new field in Claromentis here.

							137		
Admin / LDAP Connections									
🏷 General	LDAP Connections								
Administrators	✓ 1. Connection								
J License	<ul> <li>2. Directory Settings</li> </ul>	2. Directory Settings							
Date and Time	✓ 3. LDAP Attributes /	Claromentis	Metadata						
Background Services	Example Us	er - DN		0	F	etch Attrib	utes		
1 Localisation		LDAP Attribut	Claromentis Metadata						
Configuration		givenname	firstname	×					
1 ( . h.		sn	surname	×					
Labs		company	company	×					11
ntegrations		title	job_title	×					11
🛏 API keys		telephonenum	per [m]usr_phone	×					11
🛚 Mailgun		mobile	[m]usr_mobile	×					11
LDAP		initials	[m]usr_interests	×					
	Additional S		Populate Claromentis OrgChart based on specified ontinue	LDAP attribute	gi	ivenname	¢		
	✓ 4. User Groups								
	🖌 5. Status								

Image 2 - Section 3 of the LDAP tool

## **Configuring Profile fields**

To set up a new user profile field to bring across from AD, we first need to update the table of Section 3 to reflect all the fields that are currently syncing.

- To do this, we need to "fetch attributes" from a user profile in the Intranet that has been synced from AD already.
- This will generate a list of attributes that are currently being synced and allow extra fields to be mapped.

Navigate to Admin > People

- Click on a user profile that has been brought across from your AD.
- There will be a "External ID" field on their profile, as shown in Image 3.
- Copy this information as we need this to fetch attributes to populate the table and be able to tie to Claromentis fields.
- Once you have copied the data in the field return to the 3rd section of the LDAP tool.

claromer	ntis	<b>Q</b> What are you looking f	for? 🔛 16	:20 <b>രാ</b>		<b>^</b>	<u>به</u>	0
						137		
Admin / People Control I	Panel / Edit user info							0
Letit user information	호 Role 忠Group 杰 Org chart 🕏 Other setting	s						
User code			🛃 Upload image	2				
Last time login	(Never)							_
Account state	The status for this user is set in the external directory shown b	Delow.	🕿 Email log-in de	tails				
Directory	AD1 \$							
External ID	CN=Benedict BS. Seaworthy,CN=Users,DC=ad1,DC=clarome	ntis,DC=						
Assign user to extranet area	Primary Area 🕈							
Username	AD1\benedict.seaworthy							
First name	Benedict							
Surname	Seaworthy							

Image 3 - External ID shown in a user's profile that has been synced from AD

Paste the External ID into the "Example User - DN" field.

- Click the "fetch attributes" button.
- The table below will now update with all the fields that have been mapped together and are sending information across when a sync is run.

As shown in Image 4, the last row of the table will be two drop down fields.

- This is where you select the attribute from AD and map it to the Claromentis key.
- On the left of the table is the "LDAP attribute" column, this denotes the AD field attribute.
- On the right is the "claromentis metadata" column which corresponds to the keys for Claromentis fields.

Admin / LDAP Connections									
🕏 General	LDAP Connections								
🚨 Administrators	✓ 1. Connection								
🕄 License	✓ 2. Directory Settings								
① Date and Time	✓ 3. LDAP Attributes / Claromentis Metadata								
Background Services	Example User - DN         CN=Benedict BS. Seaworthy,CN=Users,DC=ad1,DC=claromi         Image: Comparison of the seaworthy compari								
🛍 Localisation		LDAP Attri	oute	Claromentis Metadata		Example User Profile (preview)			
🛠 Configuration		givenname		firstname	×	accountexpires: 9223372036854775			
🖞 Labs		sn		surname	×	badpasswordtime: 0			
		company		company	×	badpwdcount: 0			
ntegrations		title		job_title	×	cn: Benedict BS. Seaworthy			
<ul> <li>API keys</li> </ul>		telephonenumber		[m]usr_phone	×	codepage: 0			
🖾 Mailgun		mobile		[m]usr_mobile	×	countrycode: 0			
Τ. LDAP		givennam	e 🔶	linkedin_id \$	Add	displayname: Benedict BS. Seaworth			
	Additiona	Settings	Populate Claroment Continue	is OrgChart based on specified LDAP	attribute	givenname \$			
	✓ 4. User Groups								
	✓ 5. Status								
DLDAP Search Tool						Cancel Sav			

Image 4 - The last row of the table is where new fields can be added and mapped for the next sync

Image 5 shows both lists available to choose attributes and keys from.

- In this way, you can ensure the attribute you wish to sync has been mapped to the appropriate Claromentis field key.
- In this example the title of a user (e.g. Mr, Mrs, Ms etc) has the AD attribute of "title" as shown in the left list.
- The corresponding field in Claromentis, where we want the AD information to populate, has a key of "{m}title" as shown in the list on the right.
- Once you have selected your attribute and Claromentis key for each column, click the purple "add" button.

Please note: for a Claromentis field to appear for mapping, it must be set to appear in the 'edit my profile' area on user profiles

Admin / LDAP Connections		accountexpires			
🏟 General	LDAP Connections	badpasswordtime badpwdcount cn			
🚨 Administrators	✓ 1. Connection	codepage countrycode displayname			
Eicense	✓ 2. Directory Settin	distinguishedname dn			
<ul> <li>Date and Time</li> </ul>	🗸 3. LDAP Attributes	dscorepropagationdata givenname initials			
🕫 Background Services	Example U	instancetype	eaworthy,CN=Users,DC=ad1,DC=clare	0	Fetch Attributes
Da Localisation		lastlogontimestamp logoncount	Claromentis Metadata		Example User Profile (preview)
🔀 Configuration		memberof mobile name	firstname	×	accountexpires: 92233720368547
🛓 Labs		objectcategory objectclass	surname	×	badpasswordtime: 0 badpwdcount: 0
Integrations		objectguid objectsid primarygroupid	photo skills	×	cn: Benedict BS. Seaworthy
API keys		pwdlastset samaccountname samaccounttype	skype_id twitter_id [m]address_text	×	codepage: 0
🖾 Mailgun		sn telephonenumber	[m]address_text [m]car [m]dob	×	countrycode: 0
击 LDAP		<ul> <li>title</li> <li>useraccountcontrol</li> <li>userprincipalname</li> </ul>	✓ [m]title [m]usr_career [m]usr_interests	Add	displayname: Benedict BS. Seawor
	Additional	usnchanged usnchanged whenchanged whenchanged	imjus, prefeoritat (mjus, prefeoritat ntis OrgChart based on specified LDA	P attribute	givenname 🗘
	✓ 4. User Groups				

Image 5 - Correctly mapping the AD attribute to the corresponding Claromentis key.

As shown in Image 6, my selection has been applied and a new row containing the information for "Title" has appeared.

- Underneath this row the drop down menus remain, so you can add multiple AD attributes and map them accordingly in one instance.
- Once you had added as many attributes as required, click "save".
- Now your changes have been applied and if you enter back into Section 3 of the tool you will see all the rows you added have remained.

When the next sync is run (whether manual or under your schedule) all information from the AD attributes in the table will populate the Claromentis fields you have mapped them to.

Admin / LDAP Connections										
& General LDAP Connections										
Administrators	✓ 1. Connection									
Eicense	✓ 2. Directory Settings									
<ul> <li>Date and Time</li> </ul>	✓ 3. LDAP Attributes / Claromentis Metadata									
Background Services	Example User - DN         CN=Benedict BS. Seaworthy,CN=Users,DC=ad1,DC=claro         Image: Comparison of the seaworthy of the seaworth									
🕅 Localisation		LDAP Attri	bute	Claromentis Metadata		Example User Profile (preview)				
🔀 Configuration		givenname		firstname	×	accountexpires: 92233720368547				
Å Labs		sn		surname	×	badpasswordtime: 0				
		company		company	×	badpwdcount: 0				
Integrations		title		job_title	×	cn: Benedict BS. Seaworthy				
API keys		telephonen	umber	[m]usr_phone	×	codepage: 0				
🐱 Mailgun	_	mobile		[m]usr_mobile	×	countrycode: 0				
击 LDAP	[	title		×	displayname: Benedict BS. Seawor					
III LDAP		title	\$	[m]usr_career \$	Add					
Additional Settings 🛛 Populate Claromentis OrgChart based on specified LDAP attribute										
			Continue							

Image 6 - AD attribute has been mapped to Claromentis field and added to the table.

#### **Related Article**

#### Setting up the LDAP tool

Created on 19 March 2019 by Hannah Door. Last modified on 6 December 2023 Tags: Idap, map, profile, user, mapping, attribute